



ZT44 System



Hydraulic Operator for Residential & Light Commercial Swing Gates

Greater Innovation in a Traditionally-designed Operator


The **ZT44** hydraulic operator for swing gates has been designed by Aprimatic not only for residential use but also for **residential and intensive use**. Only Aprimatic, with its great tradition in the design and production of hydraulic products could create a product which is so innovative within the range of equivalent models.

The **ZT44** is distinguished by its considerable **reliability, power, safety and low noise levels**, as well as its basic and elegant **design**. Its many efficient solutions make the **ZT44** a real innovation within the range of equivalent models:

- **Hydraulic adjustable slowdown function** during gate closing (shaft outfeed) present in all the versions offered.
This system guarantees low noise levels and reliability. The slowdown system allows you to bring the gates together gently to prevent noise and mechanical structure stress. The hydraulic slowdown function during gate closing (shaft out feed) and during gate opening (shaft infeed) is available in the DS model
- **Performance levels** unmatched by the rest of the market – **able to power gates up to a maximum width of 4 metres**.
- **Safety auto-reverse on touching and obstacle** system which uses very sensitive bypass valves, which can be set during installation. If there is an

obstacle, these valves immediately cut the hydraulic pressure, so maximum system safety is guaranteed by this system.

- **Emergency release function with customised key** which, hidden inside the upper column to maintain the pleasant appearance of the operator, also has a burglar-proof protection function.
- Maintenance facilitated by the **block box which can be accessed from the outside** and the use of components common to the other ZT line models.
- **Threaded vibration-proof flexible front fitting** which permits regulation of up to 20 mm and is very useful during installation for recovering small fitting errors.
- **Rear flange with aluminium fork** with jointed movement which guarantees considerable robustness and flexibility for fitting to the column.
- Neoprene TITANEX 11 H07 RN-F 4G1 **power supply cable** (L=1 metre), specifically designed for mobile applications in external environments (-20 °C; +90°C); internal conductor cable 4x1 mm.
- Closed tank to prevent the entry of impurities and oil leaks during the installation operations. The tank has a plug which is removed when topping up and a breather screw beneath the operator which is removed when the installation is complete.
- Basic and elegant design, ideal/or combinations with both classic and modern gates. The **ZT44** hydraulic operator has been designed to last over time.

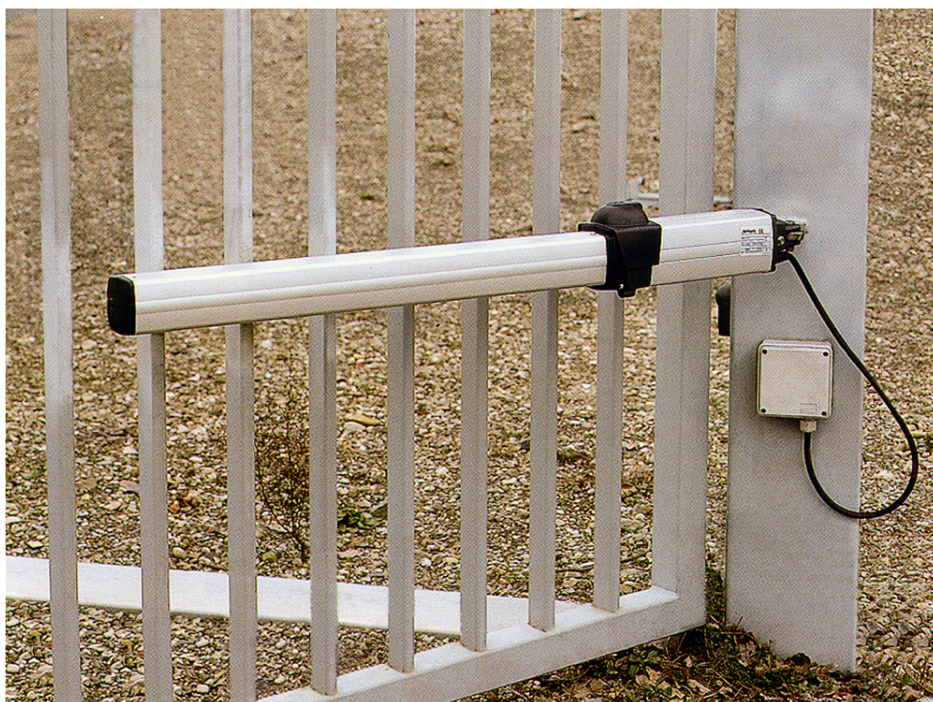



ZT44 System




MODELS

The **ZT44** is available in the following versions:

- Single **ZT44 SF** operator (without block), **C** (with closing block), **A** (with opening block), **B** (with opening and closing block), **DS** (double slowdown without block).
- The slowdown during closing function (shaft outfeed) is a standard function on all models. The code **DS** indicates models with the hydraulic slowdown function during both closing and opening.
- **Maxiset 433 ZT 44 B.** This package includes two **ZT44** operators, a T1 electronic unit, a single Memory System 433.92 Mhz radio receiver, a TR2 433.92 Mhz transmitter, a 433.92 Mhz aerial and a pair of photocells ER4/N.
- **Set 433 ZT 44 C, SE.** This package includes two **ZT44** operators, a T1 electronic unit and two customised keys. We can also offer the **ZT42 B** pedestrian operator (with opening and closing block) and **SR** (without rapid block) for maximum gate lengths of 1.2 metres.

DIMENSIONS OF THE OPERATOR




CONSTRUCTION DETAILS

- Abrasion-proof polyurethane gasket and shaft scraper which ensure that the operator can also be used in dusty and sandy environments; sinterised material shaft guide bush which ensures the long life of the shaft.
- Die-cast aluminium flange and distributor body.
- Silver anodised aluminium tank and guard.
- Every external part has been treated specifically for optimal use in all kinds of climates and environmental conditions.
- **Interchangeable with Aprimatic XT series hydraulic operators.** The same centre-to-centre distance has been retained for installation so that the old product can be replaced with the new product during system maintenance.
- Lobe pump which guarantees high pressure and low noise levels.
- Aprimatic HC13 oil which guarantees the lubrication and required viscosity at different temperatures.

OPERATOR TECHNICAL DATA


VERSIONS	C, SF, B, A, DS
CUSTOMISED KEY RELEASE	YES
SLOWDOWN	YES
NUMBER OF CYCLES	60 cycles per hour
MAX. LEAF WIDTH	4 m (SF, DS) 1.8 m (C,B,A)
SAFETY AUTO-REVERSE SYSTEM	YES
MAX. STANDARD ROD STROKE	270 mm
OPENING TIME	17 sec
CLOSING TIME	21 sec
ABSORBED POWER	250 W
MAX. THRUST FORCE	3850 N
OPERATING TEMPERATURE	-20°C + 70°C
OVERLOAD TRIGGER TEMP.	120° C
PROTECTION RATING (IP)	54

POSITIONING THE OPERATOR

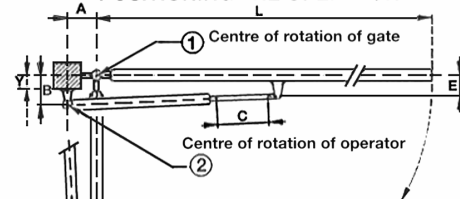

LEVELS IN MM					
	L	A	B	C	Y (max)
ZT 44	1200	70	70	140	20
	1500	80	80	160	30
	1800	90	90	180	40
	2000	110	110	220	60
	2500	120	120	240	70
	3000	130	130	260	80

WIRING DIAGRAM

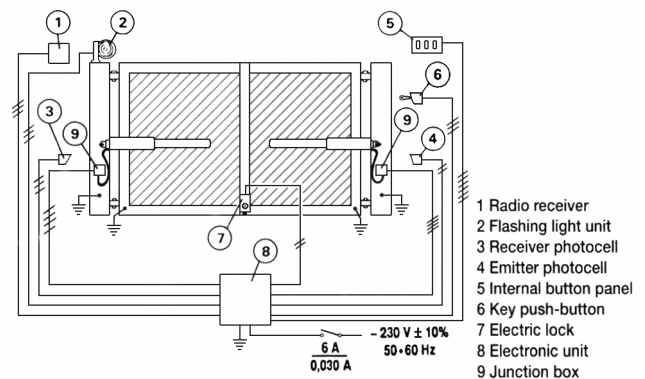

CENTURION

WESTHILL BUSINESS CENTRE, ARNHALL BUSINESS PARK, WESTHILL, ABERDEEN AB32 6UF

Tel: 01224 744440 • Fax: 01224 744819

email: info@centurionsecurity.co.uk

www.centurionsecurity.co.uk

Security • Confidence • Peace of Mind